




Single Phase Mini Monobloc Pumpset

▶ SSH

SELF PRIMING | HIGH SPEED

Parameters	Range
Power Range	0.5 - 1.0 HP
Head Range	6 - 40 m
Discharge Range	12 - 60 lpm

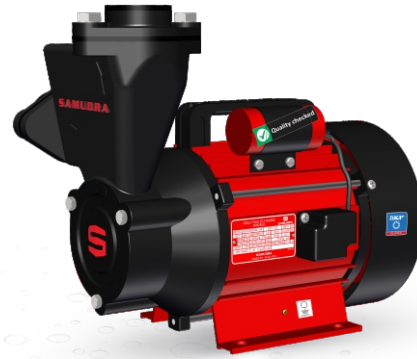

Salient Features

- TEFC design with Class 'B' insulation
- Double shielded deep groove ball bearings
- Rigid cast iron casing and forged brass Impeller
- High efficiency with wide operating range, 170 to 240 voltage
- Portable. Light weight construction with sturdy Aluminium motor frame

Operating Conditions

- Liquid temperature up to 60^oc
- Ambient temperature up to 40^oc
- Total Suction head up to 7 mtrs Continuous duty

Application

- Small Farms
- Pressure Boosting Systems
- Lawns and Gardens
- Residential Bungalows
- Hotels, Industries
- Water Circulating Systems
- Storage water tank
- Domestic water Supply