



SAMUDRA

PRODUCT

BROCHURE

INDIA 

SINGAPORE (HQ) 



www.samudrapumps.com

SS Series



STAINLESS STEEL SUBMERSIBLE PUMPS

Parameters	Range
Sizes	: 4", 6", 8" & 10"
Power	: 0.37 - 185 kW
Max. Discharge	: 280 m ³ /h
Max. Head	: 830 m

W Series



WATER FILLED REWINDABLE MOTOR

Parameters	Range
Sizes	: 4", 6", 8" & 10"
Power	: 0.37 - 185 kW
Nominal Speed	: 2900 m

(Noryl Impeller)



STAINLESS STEEL SUBMERSIBLE PUMPS

Parameters	Range
Sizes	: 4"
Power	: 0.37 - 7.5 kW
Max. Discharge	: 18 m ³ /h
Max. Head	: 550 m

CI Series



CAST IRON SUBMERSIBLE PUMPS

Parameters	Range
Sizes	: 6", 8" & 10"
Power	: 1.1 - 63 kW
Max. Discharge	: 260 m ³ /h
Max. Head	: 600 m


G Series



SOLAR PUMPING SYSTEM

Parameters	Range
Sizes	: 4", 6"
Power	: 0.37 - 37 kW
Voltages	: 110 - 380 V
Additional	: AC / DC

SMH Series

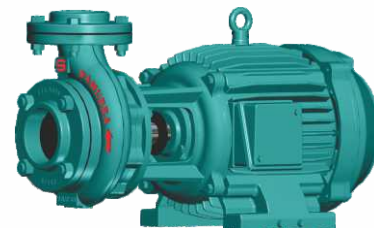

THREE PHASE HIGH SPEED MONOBLOC PUMPSET

Parameters	Range
Power Rating	: 5.0 - 10.0 HP
Head Range	: 10 - 56 m
Discharge Range	: 6.5 - 30 lps

VM & VH Series



MULTISTAGE VERTICAL & HORIZONTAL PUMPS

Parameters	Range
Power	: 0.37 - 45 kW
Max. Discharge	: 110 m ³ /h
Max. Head	: 310 m
Max. Head	: 830 m

HNS Series



PRESSURE BOOSTING SYSTEM

Parameters	Range
Q max	: 430 m ³ /h
H max	: 150 m
Frequency	: 50 / 60 Hz

SSM Series



OPENWELL SUBMERSIBLE MONOBLOC PUMPSET

Parameters	Range
Power Rating	: 3.0 - 15 HP
Head Range	: 6 - 80 m
Discharge Range	: 3.0 - 46 lps

CM Series



CENTRIFUGAL MONOBLOC PUMP

Parameters	Range
Power	: 0.37 - 30 kW
Max. Discharge	: 246 m ³ /h
Max. Head	: 95 m

PE Series



PERIPHERAL END SUCTION PUMP

Parameters	Range
Power	: 0.37 - 75 kW
Max. Discharge	: 2.2 m ³ /h
Max. Head	: 50 m

WW Series



WASTE WATER PUMPS

Parameters	Range
Power	: 0.37 - 7.5 kW
Max. Discharge	: 100 m ³ /h
Max. Head	: 27 m




uPVC COLUMN PIPES

Parameters	Range
Sizes	: 1.5" to 6"



uPVC CASING PIPES

Parameters	Range
Sizes	: 4" - 14"
Additional	: CS / CM / CD



SUBMERSIBLE CABLES

Parameters	Range
Sizes	: 1.5 - 150 sq. mm
Additional	: PVC Rubber (EPDM) 3 Core 4 Core Round Flat



CONTROL PANELS

Parameters	Range
Power	: 0.37 - 185 kW
Additional	: DOL Star-Delta Auto-Transformer Soft-Starter

Headquarters :
Samudra Pte Ltd
1 Keong Saik Road,
Unit 10 - The Woking Capitol
Singapore 089109

+65 6813 2111

info@samudra.net

India Operations :
Samudra Pumps (India) Pvt Ltd
Registered Office
1st Floor, Door No. 737/2, Sai Aashrya,
Puliyakulam Road, Puliyakulam,
Coimbatore - 641 045,
Tamilnadu, India

+91 82200 48894

exports@samudrapumps.com